



TOPRING

TOPRING

TOPRING

2020 SELECTION FOR MECHANICAL WORKSHOPS

TOPRING

2020 SELECTION FOR MECHANICAL WORKSHOPS

INDEX

HOSE REELS	P 3
AIR HOSES	P 4 • 5
BRASS FITTINGS	P 5
QUICK COUPLERS AND PLUGS	P 6 • 7
COMPRESSED AIR TOOLS	P 8 • 12
- Inflator gauges, air chucks and tire gauges	
- Blow guns	
- Brake bleeder / washing gun	
- Air tool and compressor oils	
- Accessories	
AIR TREATMENT	P 13
- Compressor room	
AIR PREPARATION AT THE TOOL	P 13 • 14 • 15
- Filters, regulators, lubricators and combined units	

TOPRING can help you with your compressed air system project

Whether you need technical support or specific project guidances, our technical team is always available to help you with your compressed air system project. Our technical advisors can visit your company to help you optimize your system by offering solutions tailored to your needs.

Contact us to make an appointment. Call us at **1 800 263-8677** or write to solutions@topring.ca



HOSE REELS



TopReel HD

INDUSTRIAL HEAVY-DUTY HOSE REEL

With **flex** hybrid technopolymer air hose 300 PSI



79.484	3/8 x 50 ft x 1/4 (M) NPT	Lrg
79.489	1/2 x 50 ft x 3/8 (M) NPT	XLrg

With **THERMOFLEX** technopolymer air hose 300 PSI



79.514	3/8 x 50 ft x 1/4 (M) NPT	Lrg
--------	---------------------------	-----

With **SUPERFLEX** rubber air hose 250 PSI



79.524	3/8 x 50 ft x 1/4 (M) NPT	Lrg
79.529	1/2 x 50 ft x 3/8 (M) NPT	XLrg

No 1 Choice
for automobile/truck
mechanical workshops,
bodyshops and
tire centers



- Automatic rewind
- Heavy-duty steel construction
- Corrosion-resistant epoxy powder coat finish
- Wide profile base with grooved reinforcement supported on each side
- Adjustable double-guide arm for handling up to 3 positions
- 5 installation options

Replacement parts available



- Economical reels
- Automatique rewind
- Steel construction
- Corrosion-resistant epoxy powder coat finish
- Wide L-shaped base
- 5 installation options

MAXREEL

PROFESSIONAL HOSE REEL

With **TOPFLEX** rubber air hose 250 PSI



79.322	3/8 x 25 ft x 1/4 (M) NPT	Std
79.323	3/8 x 33 ft x 1/4 (M) NPT	Std
79.324	3/8 x 50 ft x 1/4 (M) NPT	Lrg
79.326	1/2 x 50 ft x 3/8 (M) NPT	XLrg

With **flex** hybrid technopolymer air hose 300 PSI



79.334	3/8 x 50 ft x 1/4 (M) NPT	Lrg
79.336	1/2 x 50 ft x 3/8 (M) NPT	XLrg

CONNECTING RUBBER HOSE FOR TopReel HD HOSE REEL



79.011	3/8 x 5 ft x 1/4 (M) NPT
79.013	1/2 x 5 ft x 3/8 (M) NPT

RolAir

NEW

PROFESSIONAL WATER HOSE REEL

With PVC water hose 150 PSI

- Light and compact
- Rugged case made of high-quality polymer
- Speed control device for safer rewinding
- Wall mounting with a 180° swivel bracket

79.175	5/8 x 50 ft • Thread 3/4 GHT
--------	------------------------------



AIR HOSES

SUPERFLEX® RUBBER AIR HOSE


Non-conductive
at 1000 volts D.C.



75.315	3/8 x 25 ft x 1/4 (M) NPT
75.319	3/8 x 50 ft x 1/4 (M) NPT
75.415	1/2 x 25 ft x 3/8 (M) NPT
75.418	1/2 x 50 ft x 1/2 (M) NPT
75.419	1/2 x 50 ft x 3/8 (M) NPT
75.560	3/4 x 50 ft x 3/4 (M) NPT

- High quality hose offering maximum resistance to oils, gasoline, kerosene, fuel oils, lubricating oils and other petroleum based products

EASYflex® PREMIUM TECHNOPOLYMER AIR HOSE



72.364	3/8 x 25 ft x 1/4 (M) NPT
72.366	3/8 x 35 ft x 1/4 (M) NPT
72.368	3/8 x 50 ft x 1/4 (M) NPT
72.465	1/2 x 25 ft x 3/8 (M) NPT
72.468	1/2 x 50 ft x 1/2 (M) NPT
72.469	1/2 x 50 ft x 3/8 (M) NPT
72.328*	3/8 x 50 ft x 1/4 (M) NPT

- Ultra-flexible at extremely low temperatures
- Light and easy to handle
- Silicone free

*Red colored hose

AIRFLEX® Premium RUBBER AIR HOSE

Compatible
with water



71.315	3/8 x 25 ft x 1/4 (M) NPT
71.317	3/8 x 35 ft x 1/4 (M) NPT
71.318	3/8 x 50 ft x 3/8 (M) NPT
71.319	3/8 x 50 ft x 1/4 (M) NPT
71.418	1/2 x 50 ft x 1/2 (M) NPT
71.419	1/2 x 50 ft x 3/8 (M) NPT

- Quality general purpose flexible rubber hose
- Cover with medium oil resistance (RMA-Classe C)
- Excellent resistance to abrasion

THERMOFLEX® TECHNOPOLYMER AIR HOSE

Ideal for
spray paint



72.315	3/8 x 25 ft x 1/4 (M) NPT
72.317	3/8 x 35 ft x 1/4 (M) NPT
72.319	3/8 x 50 ft x 1/4 (M) NPT

- Ideal for applications in contact with paints and solvents
- Excellent abrasion resistance

FLEXhybrid® TECHNOPOLYMER AIR HOSE

Quality-Price



70.316	3/8 x 25 ft x 1/4 (M) NPT
70.318	3/8 x 50 ft x 1/4 (M) NPT
70.419	1/2 x 50 ft x 3/8 (M) NPT

- Lightweight and excellent flexibility
- Good resistance to oils, heat, ozone and abrasion
- Economical

TOPFLEX® RUBBER AIR HOSE

With
"LOCK-ON"
fittings



77.345	3/8 x 25 ft x 1/4 (M) NPT
77.348	3/8 x 50 ft x 1/4 (M) NPT
77.445	1/2 x 25 ft x 3/8 (M) NPT
77.448	1/2 x 50 ft x 3/8 (M) NPT

- Lightweight and flexible
- Extremely resistant to oils and heat (RMA-Classe A)

TOPFLEX SPARK® RUBBER AIR HOSE

With "LOCK-ON" fittings



77.365	3/8 x 25 ft x 1/4 (M) NPT
77.465	1/2 x 25 ft x 3/8 (M) NPT

- Lightweight and flexible
- Cover with medium/high oil and abrasion resistance (RMA-Classe B)
- Flame retardant cover

MAXPRO® RUBBER AIR HOSE



71.375	3/8 x 25 ft x 1/4 (M) NPT
71.379	3/8 x 50 ft x 1/4 (M) NPT


- Heavy-duty economical hose
- Cover with medium oil resistance (RMA-Classe C)
- High tensile polyester yarns reinforcement reduce elongation under pressure



BRASS FITTINGS

MAXAIR

POLYURETHANE SELF-STORING HOSE

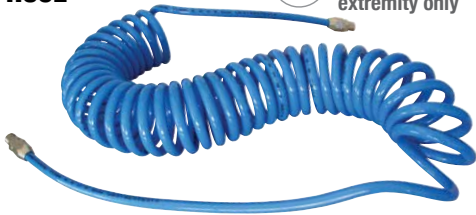

360° Swivel fitting at the air supply extremity only

14.620	1/4 x 25 ft x 1/4 (M) NPT
14.650	1/4 x 50 ft x 1/4 (M) NPT
14.724	3/8 x 25 ft x 1/4 (M) NPT
14.754	3/8 x 50 ft x 1/4 (M) NPT

- ESTER-base polyurethane hose ideal for applications in presence of oils
- Highly abrasion and kink resistant
- Silicone-free materials

FLEXCOIL

POLYURETHANE SELF-STORING HOSE



Swivel fittings at both ends

360°

17.610	1/4 x 15 ft x 1/4 (M) NPT
17.610.07*	1/4 x 15 ft x 1/4 (M) NPT
17.620	1/4 x 25 ft x 1/4 (M) NPT
17.620.07*	1/4 x 25 ft x 1/4 (M) NPT
17.724	3/8 x 25 ft x 1/4 (M) NPT
17.754	3/8 x 50 ft x 1/4 (M) NPT

- ETHER-based polyurethane properties offer longer lifespan
- Excellent resistance to abrasion, kink and moisture
- Silicone-free materials

*Blue colored hose

STANDARD PTFE SEALING TAPE

- Prevents air leaks on all threaded connections
- Industrial quality

41.005	12 mm x 12 meters
--------	-------------------



MALE HEXAGONAL NIPPLE




41.105	1/4 (M) NPT
41.115	3/8 (M) NPT

MALE HEXAGONAL NIPPLE REDUCER



41.195	1/4 (F) NPT
41.200	3/8 (F) NPT

HEXAGONAL ADAPTER



41.150	1/4 (F) NPT
	3/8 (F) NPT

REDUCING BUSHING




41.175	1/4 (F) NPT • 3/8 (M) NPT
41.185	3/8 (F) NPT • 1/2 (M) NPT

HOSE BARB SPLICER



41.510	I.D. 1/4
41.530	I.D. 3/8
41.540	I.D. 1/2

HOSE BARB TO MALE FTPE



41.550	I.D. 1/4 x 1/4 (M) NPT
41.570	I.D. 3/8 x 1/4 (M) NPT
41.580	I.D. 3/8 x 3/8 (M) NPT
41.584	I.D. 3/8 x 1/2 (M) NPT
41.590	I.D. 1/2 x 3/8 (M) NPT

HOSE BARB TO FEMALE FTPE



41.630	I.D. 3/8 x 1/4 (F) NPT
41.650	I.D. 1/2 x 3/8 (F) NPT

HOSE BARB TO MALE FTPE



41.862	I.D. 3/8 x 1/4 (M) NPT
41.866	I.D. 1/2 x 3/8 (M) NPT



HOSE BARB SPLICER



41.882	I.D. 1/2
--------	----------



REPAIR KIT FOR 3/8 ID HOSE

41.531C	1x Hose barb splicer 2x Ear hose clamps
---------	--

41.534C	1x 1/4 (M) NPT hose barb 1x Ear hose clamp
---------	---



QUICK COUPLERS AND PLUGS



TOPQUIK S1 SAFETY / AUTOMATIC



SAFE DISCONNECTION IN A SINGLE PUSH

INDUSTRIAL		SCFM
I/M 1/4	20.415	1/4 (F) NPT 34
	20.435	3/8 (F) NPT
I/M 3/8	21.415	1/4 (F) NPT 81
	21.435	3/8 (F) NPT
ARO 210		
A 1/4	23.415	1/4 (F) NPT 32
	23.435	3/8 (F) NPT
ULTRAFLO		
E 7.8	31.715	1/4 (F) NPT
	31.735	3/8 (F) NPT
	31.815	1/4 (M) NPT 73
	31.835	3/8 (M) NPT
	31.875	1/2 (M) NPT



TOPQUIK SAFETY / AUTOMATIC



SAFE DISCONNECTION IN 2 STEPS

INDUSTRIAL		SCFM
I/M 1/4	20.449	1/4 (F) NPT 36
	20.469	3/8 (F) NPT
I/M 3/8	21.449	1/4 (F) NPT 73
	21.469	3/8 (F) NPT
I/M 1/2	22.469	3/8 (F) NPT 167
	22.489	1/2 (F) NPT
ULTRAFLO		
E 7.8	31.749	1/4 (F) NPT
	31.769	3/8 (F) NPT 59
	31.849	1/4 (M) NPT
	31.869	3/8 (M) NPT

QUIKSILVER AUTOMATIC



INDUSTRIAL		SCFM
I/M 1/4	20.446	1/4 (F) NPT
	20.466	3/8 (F) NPT 44
	20.646	1/4 (M) NPT
	20.666	3/8 (M) NPT
I/M 3/8	21.446	1/4 (F) NPT 72
	21.466	3/8 (F) NPT
	21.666	3/8 (M) NPT
I/M 1/2	22.466	3/8 (F) NPT 145
	22.486	1/2 (F) NPT
ARO 210		
A 1/4	23.446	1/4 (F) NPT 44
	23.646	1/4 (M) NPT
ULTRAFLO		
E 7.8	31.744	1/4 (F) NPT
	31.764	3/8 (F) NPT 80
	31.844	1/4 (M) NPT
	31.864	3/8 (M) NPT

QUIKSILVER 2 AUTOMATIC

NEW



More compact than
QUIKSILVER

INDUSTRIAL		SCFM
I/M 1/4	20.416	1/4 (F) NPT 44
	20.436	3/8 (F) NPT
ULTRAFLO		
E 7.8	31.746	1/4 (F) NPT 80
	31.766	3/8 (F) NPT

QUIKSILVER AIR TOOL CONNECTION KIT



ULTRAFLO		80 SCFM
31.711C	Coupler	1/4 (F) NPT
	Plug	1/4 (M) NPT

PLUGS




IND 1/4	IND 3/8	IND 1/2	ARO 210	TRU 1/4	TRU 3/8	TRU 1/2	LINCOLN	ULTRAFLO
INDUSTRIAL								
I/M 1/4	20.142	1/4 (F) NPT						
	20.162	3/8 (F) NPT						
	20.242	1/4 (M) NPT						
	20.262	3/8 (M) NPT						
I/M 3/8	21.142	1/4 (F) NPT						
	21.162	3/8 (F) NPT						
	21.242	1/4 (M) NPT						
	21.262	3/8 (M) NPT						
I/M 1/2	22.162	3/8 (F) NPT						
	22.182	1/2 (F) NPT						
	22.242	1/4 (M) NPT						
	22.262	3/8 (M) NPT						
	22.282	1/2 (M) NPT						
ARO 210								
A 1/4	23.142	1/4 (F) NPT						
	23.242	1/4 (M) NPT						
TRUFLATE								
T 1/4	24.142	1/4 (F) NPT						
	24.242	1/4 (M) NPT						
T 3/8	25.142	1/4 (F) NPT						
	25.162	3/8 (F) NPT						
	25.242	1/4 (M) NPT						
	25.262	3/8 (M) NPT						
T 1/2	25.362	3/8 (F) NPT						
	25.462	3/8 (M) NPT						
	25.382	1/2 (F) NPT						
	25.482	1/2 (M) NPT						
LINCOLN								
L 1/4	26.142	1/4 (F) NPT						
	26.242	1/4 (M) NPT						
ULTRAFLO								
E 7.8	31.542	1/4 (F) NPT						
	31.562	3/8 (F) NPT						
	31.642	1/4 (M) NPT						
	31.662	3/8 (M) NPT						

QUICK COUPLERS AND PLUGS



MAXQUIK MANUAL

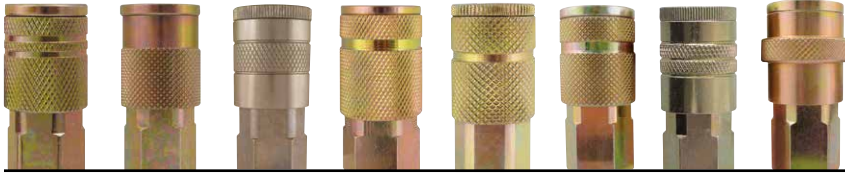


IND 1/4 IND 3/8 IND 1/2 ARO 210 TRU 1/4 TRU 3/8 TRU 1/2 TRU 3/8 EASY GRIP

INDUSTRIAL		SCFM
I/M 1/4	20.842	1/4 (F) NPT
	20.862	3/8 (F) NPT
I/M 3/8	21.842	1/4 (F) NPT
	21.862	3/8 (F) NPT
	21.942	1/4 (M) NPT
	21.962	3/8 (M) NPT
I/M 1/2	22.862	3/8 (F) NPT
	22.882	1/2 (F) NPT
	22.982	1/2 (M) NPT
ARO 210		
A 1/4	23.842	1/4 (F) NPT
	23.942	1/4 (M) NPT

TRUFLATE		SCFM
T 1/4	24.844	1/4 (F) NPT
	25.842	1/4 (F) NPT
T 3/8	25.862	3/8 (F) NPT
	25.942	1/4 (M) NPT
	25.962	3/8 (M) NPT
	25.662	3/8 (F) NPT
T 1/2	25.682	1/2 (F) NPT
	TRUFLATE EASY GRIP	
T 3/8	25.844	1/4 (F) NPT
	25.864	3/8 (F) NPT

AUTOMAX AUTOMATIC

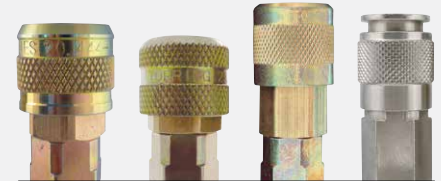

IND 1/4 • 1/2 ARO 210 LINCOLN ULTRAFLO

INDUSTRIAL		SCFM
I/M 1/4	20.444	1/4 (F) NPT
	20.464	3/8 (F) NPT
	20.644	1/4 (M) NPT
I/M 1/2	20.664	3/8 (M) NPT
	22.482	1/2 (F) NPT
	22.682	1/2 (M) NPT
ARO 210		
A 1/4	23.444	1/4 (F) NPT
	23.464	3/8 (F) NPT
	23.644	1/4 (M) NPT
	23.664	3/8 (M) NPT
LINCOLN		
L 1/4	26.442	1/4 (F) NPT
	26.642	1/4 (M) NPT
ULTRAFLO		
E 7.8	31.742	1/4 (F) NPT
	31.842	1/4 (M) NPT

MAXQUIK AIR TOOL CONNECTION KIT

INDUSTRIAL		SCFM
20.711C	Coupler 1/4 (F) NPT	24 SCFM
	Plug 1/4 (M) NPT	



UNIMAX UNIVERSAL AUTOMATIC

U 1/4	20.441	1/4 (F) NPT	37 SCFM
----------	--------	-------------	---------

Accept 5 type of plugs:
1/4 INDUSTRIAL, ARO 210, 1/4 TRUFLATE,
LINCOLN and ULTRAFLO



UNISAFE UNIVERSAL SAFETY AUTOMATIC

U 1/4	20.448	1/4 (F) NPT	34 SCFM
----------	--------	-------------	---------

Accept 3 type of plugs:
1/4 INDUSTRIAL, ARO 210 and 1/4 TRUFLATE



AIRPRO 90° FREE ANGLE FITTING




Ergonomics

62.332	1/4 (F) NPT x 1/4 (M) NPT
62.334	3/8 (F) NPT x 3/8 (M) NPT



TOPFLEX® HOSE WHIP



Hose length: 18 in

62.542	D.I. 3/8 x 1/4 (F)(M) NPT
62.546	D.I. 1/2 x 3/8 (F)(M) NPT




COMPRESSED AIR TOOLS



LEVER TYPE INFLATOR GAUGE WITH GLASS LENS

- 3 FUNCTIONS: inflation, deflation and measures tire pressure
- Flexible 38 cm (15 in) rubber hose with swivel dual foot air chuck
- Nitrogen compatible

63.658 10 to 160 PSI

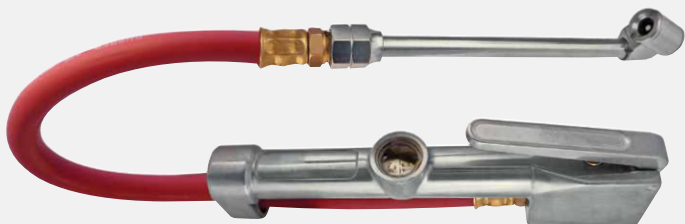

DIGITAL TIRE GAUGE



- Displays in increments of 0.5 / Auto shut-off
- Nitrogen compatible

63.630 2 to 100 PSI



- Angle air chuck
- Displays in increments of 0.5 / Auto shut-off
- Nitrogen compatible

63.640 2 to 150 PSI

CLOSED AIR CHUCKS



LOCKABLE
63.100 1/4 (F) NPT



FOR LARGE BORE VALVE
63.105 1/4 (F) NPT



CLOSED BALL FOOT
63.110 1/4 (F) NPT



CLOSED BALL FOOT
63.130C 1/4 (F) NPT



63.170C



63.150C



63.160C



63.140C

CLOSED EXTENDED DUAL FOOT / 15 CM
63.140C 1/4 (F) NPT

CLOSED EXTENDED DUAL FOOT / 34 CM
63.150 1/4 (F) NPT

CLOSED TILT LOCK DUAL FOOT
63.160C 1/4 (F) NPT

CLOSED TILT LOCK DUAL FOOT
63.170C 1/4 (F) NPT

OPEN-AIR CHUCKS (FLOW-THRU)



STRAIGHT WITH CLIP-ON
63.203 1/4 (F) NPT



STRAIGHT WITH CLIP-ON
63.205C 1/4 hose barb



DUAL FOOT / 15 CM
63.240 1/4 (F) NPT

STANDARD TIRE GAUGE



STANDARD
63.400C 5 to 50 PSI



HIGH-PRESSURE
63.410C 10 to 120 PSI



TRACTOR AIR/LIQUID
63.440C 5 to 50 PSI



EXTRA-LOW PRESSURE
63.460C 1 to 20 PSI



DUAL FOOT / 15 CM
63.500C 10 to 120 PSI



DUAL FOOT / 30 CM
63.540C 10 à 150 PSI



DUAL FOOT / 27 CM
63.545C 10 to 160 PSI



DUAL STRAIGHT / 28 CM
63.570C 10 to 150 PSI



COMPRESSED AIR TOOLS



DIGITAL TIRE INFLATOR GAUGE

- Large 90 mm gauge with LCD display for pressure reading from 0 to 174 PSI (0-12 bar) / 0.1 increment
- 3 FUNCTIONS: inflates, deflates and measures tire pressure
- 4 pressure reading measures PSI, BAR, KGF and KPA
- Flexible 1 m (39 in) hose
- Nitrogen compatible

63.661 0 to 174 PSI



FTSTOL GRIP DIAL INFLATOR GAUGE

- 60 mm gauge for accurate pressure reading from 0 to 90 PSI (0-6 bar) / 1 PSI increment
- 3 functions: inflation, deflation and measures tire pressure
- Flexible 38 cm (15 in) rubber hose

63.711 0 to 90 PSI



PROFESSIONAL DIAL TIRE INFLATOR GAUGE

- Clear and easy-to-read 80 mm dial display with accurate pressure reading from 7 to 180 PSI (0.5-12 BAR) / 2 PSI increments
- 3 FUNCTIONS: inflates, deflates and measures tire pressure
- Flexible 1 m (39 in) hose

63.683 7 to 180 PSI



TIRE TREAD DEPTH INDICATOR

1/32 in units and mm calibration



63.700C

HEAVY-DUTY PROFESSIONAL INFLATOR GAUGE FOR HEAVY VEHICLES

- Designed for vehicles with high-pressure tires
- Large 90 mm gauge with accurate pressure reading from 0 to 170 PSI (0-12 bar) / 2 PSI increments
- 45° angle swivel gauge protected from high pressure (max 350 PSI)
- Heavy duty ftstol grip (zinc/brass alloy)
- 3 FUNCTIONS: inflates, deflates and measures tire pressure
- Flexible 2 m hose (distance required by safety agencies)
- Nitrogen compatible

63.692 0 to 170 PSI



TIRE VALVE REPAIR TOOL

Repairs inside and outside valve threads



63.900C

VALVE CORE EXTRACTOR

For inserting and removing tire valve cores



63.930C

COMPRESSED AIR TOOLS

AIRPRO BLOW GUNS

- Polymer material construction provides maximum durability
- High impact resistance and chemically inert
- Easily cleaned of oil and greases without solvents
- Ergonomic design reduces hand fatigue and minimizes carpal tunnel syndrome

AIRPRO MAXIMUM SAFETY

Antiscratch nozzle

60.385
8 mm x 10 cm tube



A UNIQUE CONCEPT

If the tube of the blow gun is blocked, a safety check valve located inside the blow gun mechanism shuts off the airflow immediately

60.389
8 mm x 10 cm tube



MAXJET PENCIL STYLE BLOW GUN

- Provide a narrow, high velocity jet of air
- Compact and light, fit into a shirt pocket like a pen
- Twist to adjust flow



60.005 150 PSI

With 1/4 INDUSTRIAL plug



60.010 150 PSI

With ARO 210 plug



60.015 150 PSI

With ULTRAFLO plug

AIRPRO SAFETY WITH HIGH PERFORMANCE 90° NOZZLE

If the tip of the nozzle is blocked, the airflow escapes through the side holes and the static pressure remains under 30 PSI

Less than 30 PSI



Push-to-connect safety interchangeable nozzle



60.373
8 mm x 100 cm tube



Facilitates cleaning of cylindrical objects and hard to reach areas

COMPRESSED AIR TOOLS



AIRPRO NON-RESTRICTED



Antiscratch nozzle

60.320

6 mm x 10 cm tube

60.325

6 mm x 30 cm tube

60.330

6 mm x 10 cm tube

Blow guns with 30, 50 and 100 cm straight tube designed for hard to reach places



60.393

8 mm x 30 cm tube

60.396

8 mm x 100 cm tube

60.395

8 mm x 50 cm tube

60.390

8 mm x 10 cm tube

TOPQUIK® SAFETY BLOW GUN WITH ULTRAFLO INTEGRATED PLUG



If the tip of the nozzle is blocked, the air escapes through the side holes and the static pressure remains under 30 PSI




60.082

ULTRAFLO plug type

Integrated plug saves installation time for the user and the risk of leakage

MAXPRO SAFETY HIGH FLOW BLOW GUN WITH VENTURI NOZZLE

If the tip of the nozzle is blocked, the air escapes through the side holes and the static pressure remains under 30 PSI



60.561 Standard tube

60.563 30 cm tube

60.564 60 cm tube

COMPACT NON RESTRICTED BLOW GUN



Antiscratch nozzle

60.110

COMPRESSED AIR TOOLS

AIRPRO COMPRESSED AIR BRAKE BLEEDER

- Compact size
- Operated by one person
- Automatic shut-off
- Clear drain tubing

61.115

1.2 L brake bleeder with replenishment system



AIRPRO JET PRESSURE WASHER GUN

- Combines compressed air and water for a powerful spray
- Perfect for cleaning hard to reach places
- Adjustable trigger to control the volume of water
- Trigger handle to control air flow



NEW



61.140

Jet pressure washing gun

Included

- 1/2 connector for garden quick couplers
- 3/4 (F) GHT integrated connection for garden hoses
- Wide jet nozzle

CARTREG® PRESET REGULATOR

- Ensures optimal air tool efficiency
- Provides a constant pressure
- Increases tool service life
- Inlet/Outlet 1/4 (M) NPT

62.242* Preset pressure: 29 PSI

62.250 Preset pressure: 90 PSI

*Compliant with OSHA regulations



MAXPRO IN-LINE LUBRICATOR

- Automatically lubricates a tool by feeding a measured amount of oil mist on each cycle
- Clear plastic reservoir to check oil supply

62.108 Inlet/Outlet 1/4 (F-M) NPT



HVLP AIR REGULATOR

- Lightweight and compact air pressure regulator and gauge combination
- Precise air pressure control
- Push-to-lock knob avoids accidental pressure adjustments

62.125 1/4 (F) NPT • 2 to 125 PSI



IDEAL FOR PAINT GUNS

IN-LINE DESICCANT FILTER

- Compact size and lightweight
- Guard made of a chemical-resistant nylon
- Installed right at the point of use, it functions in either direction

62.150 1/4 (F, M) NPT



IDEAL FOR PAINT GUNS

PREMIUM MINERAL OIL FOR AIR TOOL

- Detergent-free mineral formula
- Contains premium anti-wear additives, corrosion inhibitors and antioxidants additives
- Pour point -32 °C /ISO Grade 32

69.050 500 ml

69.101 1 L

69.104 4 L



PREMIUM MINERAL OIL FOR RECIPROCATING COMPRESSOR

- Non-detergent mineral oil
- Maximum lubrication and components protection
- Excellent anti-foam properties
- Pour point -18 °C /ISO Grade 150

69.201 1 L

69.204 4 L



SYNTHETIC OIL FOR RECIPROCATING COMPRESSOR

- Optimum lubricating and superior protection of compressor, cran case and cylinders
- Extends service intervals
- Excellent anti-foam properties
- Pour point -45 °C /ISO Grade 150

69.601 1 L



AIR TREATMENT

AIRFLO WATER SEPARATOR

- Ideal after the first step treatment between the compressor
- Remove up to 99% of bulk water
- Efficient automatic drain
- Powder coated



56.007*	1/2 (F) NPT	32 SCFM
56.010*	1/2 (F) NPT	88 SCFM
56.020*	3/4 (F) NPT	144 SCFM
56.030**	1 (F) NPT	232 SCFM

* Wall mounting bracket: 53.900
 ** Wall mounting bracket: 53.905

AIRFLO COMPRESSED AIR FILTER

- Oil and water vapor particle removal down to 3 microns
- Differential pressure indicator included



53.643* 3/4 (F) NPT • 70 SCFM

*Wall mounting bracket: 53.900

Push-to-connect fitting included for draining tube connection

HIFLO DISPOSABLE WATER/OIL SEPARATOR

Respect EPA landfill regulations



- Lower outlet oil concentrations in water down to 5 ppmv or less
- Non-carbon based filtration media that attract oil droplets and repels water
- Mounting bracket included

Expected duration of the disposable separator
 8 000 hrs at 30 SCFM / 5 000 hrs at 60 SCFM

57.500 Inlet 1/4 O.D. / Outlet 3/8 O.D.

TOPDRAIN® "ZERO AIR LOSS" AUTOMATIC DRAIN



- Removes condensate from compressed air system without compressed air loss
- Compact design, minimal space required
- Optimal price-performance ratio
- Easy cleaning and maintenance
- Integrated mesh strainer protects from blockage
- Ball valve strainer included



SCFM according to installation
 Compressor, cooler: 128 SCFM
 Refrigeration dryer: 249 SCFM
 Water filter or separator: 1278 SCFM

59.250

Inlet 1/2 (M) NPT / 12 mm I.D. hose barb outlet

MAXDRAIN® COMPACT ELECTRONIC AUTOMATIC DRAIN

- Continuous elimination of condensation
- Reduce compressed air loss
- Test switch, for routine inspection and depressurisation
- Reliable electronic timer
- Y strainer with ball valve and a strainer with bypass included with the 59.345

Installation at air receivers, refrigerated dryers, separators and drop legs

CYCLE TIME	PURGE TIME
30 SEC TO 45 MIN	0.5 TO 10 SEC



59.345

Inlet 1/2 (M) NPT / 1/4 (F) NPT
 Outlet 1/2 (F) NPT

59.346

Inlet 1/4 (F) NPT
 Outlet 1/4 (F) NPT



59.346

AIR PREPARATION

DESICCANT AIR DRYER



3 STEPS DRYING

- Space-saving integrated filter/regulator with gauge
- 5 micron filter with automatic drain
- 0.01 micron coalescing filter with automatic drain
- Safety slide valve included
- Silica gel desiccant beads and manometer included

54.665 1/2 (F) NPT • 25 SCFM

DIGITAL PRESSURE GAUGE



- Four digit backlight digital LCD with 1.3 cm numerals
- Can display in PSI, Bar, Kg/cm² and Kpa
- 9V Alkaline battery included
- Working pressure from 0 to 150 PSI

55.700 1/4 (M) NPT

AIR PREPARATION AT THE TOOLS



FILTERS, REGULATORS, LUBRICATORS AND COMBINED UNITS

General specifications S50•S51

Filter/Regulator

- Gauge included
- Compact design with space-saving integrated F/F
- Removes water through centrifugal force
- Removes contaminants down to 5 micron in size
- Maintains constant downstream pressure
- Push-pull adjusting knob

Combined unit F+R+L / F/R + L

- Gauge included
- Accurate pressure control with little drift
- Push-pull adjusting knob
- Removes contaminants down to 5 microns in size
- Lubrication proportioned to airflow

MODULAIR S50



MODULAIR MINI FILTER/REGULATOR

0-125 PSI / 31 SCFM

Automatic drain

50.221 1/4 (F) NPT



MODULAIR MEDIUM FILTER

150 PSI / 68 SCFM

Manual drain

50.135 1/2 (F) NPT



MODULAIR MEDIUM FILTER/REGULATOR

0-125 PSI / 33 SCFM

Manual drain

50.225 1/4 (F) NPT



MODULAIR MINI REGULATOR

0-125 PSI / 40 SCFM

50.320 1/4 (F) NPT

MODULAIR MEDIUM 0-125 PSI / 1/4: 25 SCFM / 1/2: 60 SCFM

50.325 1/4 (F) NPT

50.335 1/2 (F) NPT

AIRFLO S51

AIRFLO 200 REGULATOR

5-125 PSI • 19 SCFM

51.240 1/4 (F) NPT



AIRFLO 300 LUBRICATOR

150 PSI • 60 SCFM

51.330 1/4 (F) NPT

51.335 3/8 (F) NPT



AIRFLO 300 COMBINED UNIT F+R+L

5-125 PSI / 53 SCFM

Semi-automatic drain

51.310 1/4 (F) NPT

51.315 3/8 (F) NPT

Automatic drain

51.311 1/4 (F) NPT

51.316 3/8 (F) NPT



AIRFLO 300 COMBINED UNIT F/R+L

5-125 PSI / 60 SCFM

Semi-automatic drain

51.320 1/4 (F) NPT

51.325 3/8 (F) NPT

Automatic drain

51.321 1/4 (F) NPT

51.326 3/8 (F) NPT



AIRFLO 300 REGULATOR

88 SCFM

51.340 1/4 (F) NPT
5-125 PSI

51.341 1/4 (F) NPT
5-60 PSI

51.342 1/4 (F) NPT
5-30 PSI

51.345 3/8 (F) NPT
5-125 PSI

51.346 3/8 (F) NPT
5-60 PSI

51.347 3/8 (F) NPT
5-30 PSI



Mounting
brackets
included with
AIRFLO S51
products

Fitting
adapters
included with
AIRFLO S51
combined units

AIR PREPARATION AT THE TOOLS



Regulator

- Gauge included
- Compact size
- Push-pull adjusting knob
- Maintains constant downstream pressure

Filter

- Compact size
- Removes water through centrifugal force
- Removes contaminants down to 5 micron in size

Lubricator

- Compact size
- Lubrication proportioned to airflow

S51 Venting safety lock-out valve

- Shut-off valve that cuts off the air inlet and outlet
- Accepts standard single padlock or safety lock for multiple lockout
- Meets OSHA Standard 29 CFR – part 10

NOTE: All SCFMs are indicated with a maximum air flow of 100 PSI / Replacement parts available

AIRFLO S51

AIRFLO 300 FILTER/REGULATOR

5-125 PSI • 70 SCFM
Semi-automatic drain

51.350 1/4 (F) NPT

51.355 3/8 (F) NPT

Automatic drain

51.351 1/4 (F) NPT

51.356 3/8 (F) NPT



AIRFLO 300 FILTER

150 PSI • 53 SCFM
Semi-automatic drain

51.360 1/4 (F) NPT

51.365 3/8 (F) NPT

Automatic drain

51.361 1/4 (F) NPT


51.366 3/8 (F) NPT



AIRFLO 300 SAFETY LOCKOUT VALVE

150 PSI

51.375 3/8 (F) NPT
Vent port 1/4 (F) NPT



AIRFLO 400 COMBINED UNIT F/R+L

5-125 PSI • 84 SCFM
Automatic drain

51.406 1/2 (F) NPT



AIRFLO 400 REGULATOR

5-125 PSI • 212 SCFM

51.445 1/2 (F) NPT



AIRFLO 400 FILTER/REGULATOR

5-125 PSI • 141 SCFM
Automatic drain

51.456 1/2 (F) NPT



AIRFLO 400 COMBINED UNIT F+R+L

5-125 PSI • 141 SCFM
Automatic drain

51.416 1/2 (F) NPT



AIRFLO 400 FILTER

150 PSI • 141 SCFM
Semi-automatic drain


51.465 1/2 (F) NPT



AIRFLO 500 COMBINED UNIT F+R+L

5-125 PSI / 247 SCFM
Semi-automatic drain

51.510 3/4 (F) NPT

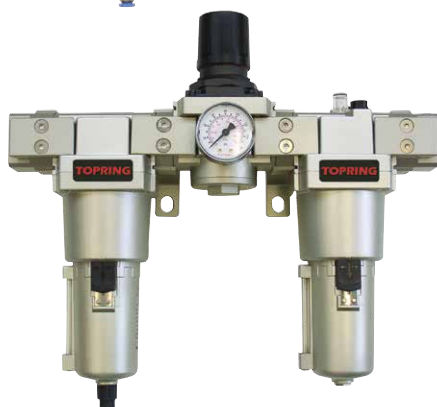

FILTER AIRFLO 500

150 PSI • 247 SCFM
Semi-automatic drain

51.560 3/4 (F) NPT



Discover our case studies on **TOPRING.com**

Learn more about our expertise and solution offers through customer testimonials. Each case study tells a real story related to compressed air. See how others have improved the safety, efficiency and performance of their system.

The screenshot shows the TOPRING website interface. At the top, there is a navigation bar with links for BLOG, CATALOGUE, CAREER, FR, and a user profile icon. Below this is the main navigation menu with links for PRODUCTS, SOLUTIONS, RESOURCE CENTER, and FTFTNG SYSTEMS, along with a search icon. The main content area features a large hero image of a smiling man in a workshop. Below the hero image is a horizontal menu with links for PRODUCT INFO, VIDEOS, WHITE PAPERS, CASE STUDIES (highlighted), FAQ EXPERT, and CONVERSION TOOLS. On the left side, there are five dropdown menus for filtering content: Product type, Groups, Brands, Solutions, and Sectors. Below these is a red button labeled 'SEARCH'. On the right side, there is a featured case study titled 'Quick coupler and air hose' with a PDF icon and the text 'PDF - 4 pages - 2018 - English'. The case study description states: 'The compressed air network of a car garage is at the heart of the smooth running of operations. Its efficiency must be the priority because the lack of power in the tools prevents the mechanics from being able to do their work in time. Discover in this case study how Topring's expertise has provided solutions to improve the performance of compressed air tools and ensure a good efficiency of air delivery to the tools.' Below the case study is a red button labeled 'LEARN MORE'.

Visit our blog on compressed air

Our blog posts are a great source of information on compressed air systems and give practical advice on how to optimize your use of compressed air.

> Go to www.TOPRING.com/en/blog

Distributed by

TOPRING
Compressed air solutions since 1979

TOPRING.com
t 1 800 263-8677
450 375-1828
@ solutions@topring.ca

f **in** **▶**